

RF HARVESTER FOR DC SUPPLY

ILHAM SHAFINI BINTI AHMAD MAHYUDIN

UNIVERSITI MALAYSIA PERLIS

2014

© This item is protected by original copyright



RF HARVESTER FOR DC SUPPLY

by

**Ilham Shafini Binti Ahmad Mahyudin
(1332220855)**

A dissertation submitted in partial fulfillment of the requirements for the degree of
Master of Science (Electrical Power Engineering)

**School of Electrical System Engineering
UNIVERSITI MALAYSIA PERLIS**

2014

DISSERTATION DECLARATION FORM
UNIVERSITI MALAYSIA PERLIS

DECLARATION OF DISSERTATION

Author's full name : ILHAM SHAFINI BINTI AHMAD MAHYUDIN
Date of Birth : 4 DECEMBER 1982
Title : RF HARVESTER FOR DC SUPPLY
Academic Session : 2014 / 2015

I hereby declare that this dissertation becomes the property of Universiti Malaysia Perlis (UniMAP) and to be place at the library of UniMAP. This dissertation is classified as :

- CONFIDENTIAL** (Contains confidential information under Official Secret Act 1972)
- RESTRICTED** (Contains restricted information as specified by the organization where research was done)
- OPEN ACCESS** I agree that my dissertation is to be made immediately available as hard copy or on-line open access (full text)


I, the author, give permission to the UniMAP to reproduce this dissertation in whole or in the part for the purpose of research or academic exchange only (except during a period of ____ years, if so requested above).

Certified by :


SIGNATURE

821204-11-5060
NEW IC NO. / PASSPORT NO.

Date : 5 AUGUST 2014

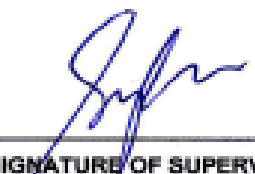
SIGNATURE OF SUPERVISOR

Prof. Dr. Syed Idris bin Syed Hassan
Pensyarah
PPK Sistem Elektrik
NAME OF SUPERVISOR
Universiti Malaysia Perlis (UniMAP)

Date : 5/8/2014

ACKNOWLEDGMENT

In the name of Allah, all praises and thanks to Allah, with His permission I have completed this project successfully.

I wish to express sincere gratitude to my supervisor, Professor Dr. Syed Idris Bin Syed Hassan for being my mentor with invaluable guidance, patience, support and for sincerely willing to guide me in my effort of accomplishing this dissertation.

I would like to express my thankfulness to Mr. Rosemizi Bin Abd Rahim and Miss Afifah Shuhada Binti Rosmi for their help in using Advance Digital System (ADS 2009) and Phd students in School of Microelectronic UniMAP for their willingness to spend their time to teach and guide me in using CST Microwave Studio 2012 software.

A special thanks to all Universiti Malaysia Perlis staffs, especially to all my officemates, which understand me and their encouragement that make my project going smooth without any work place disturbance.

Moreover, thank you to all Electrical System Engineering lecturers and administration staffs for giving me a hand and opportunity to do my dissertation.

My most grateful and respect to my husband, my daughter and family members that help me pass through the entire hard situation throughout the completion of this project.

Lastly, I would like to extend my gratitude to my fellow friends in Universiti Malaysia Perlis especially my classmate for their help, constant encouragement and kind suggestion.

TABLE OF CONTENTS

	PAGE
THESIS DECLARATION	i
ACKNOWLEDGMENT	ii
TABLE OF CONTENTS	iii
LIST OF TABLES	vii
LIST OF FIGURES	viii
LIST OF ABBREVIATIONS	x
LIST OF SYMBOLS	xi
ABSTRAK	xiii
ABSTRACT	xiv
CHAPTER 1 INTRODUCTION	
1.1 Introduction	1

1.2	Problem Statement	3
1.3	Research Objective	4
1.4	Scope of Project	4
1.5	Thesis Outlines	5

CHAPTER 2 LITERATURE REVIEW

2.1	Introduction	7
2.2	Energy Sources	8
2.2.1	Solar Energy Harvester	9
2.2.2	Thermal Energy Harvester	9
2.2.3	Piezoelectric Energy Harvester	10
2.2.4	RF Energy Harvester	10
2.3	Antenna	12
2.3.1	Wire Antennas	13
2.3.2	Aperture Antenna	14
2.3.3	Reflector Antenna	15
2.3.4	Microstrip Antenna	16
2.4	Microstrip Line	18
2.5	The Wilkinson Power Combiner	20
2.6	Rectifier Circuit	22
2.6.1	Half Wave Rectifier	24
2.6.2	Full Wave Rectifier	25

2.7	Review of Previous Research	25
2.8	Summary	29

CHAPTER 3 RESEARCH METHODOLOGY

3.1	Introduction	30
3.2	Design of RF Harvester	33
3.2.1	Antenna Design	33
3.2.2	Wilkinson Power Combiner Design	40
3.2.3	Voltage Multiplier Design	43
3.3	Simulation Software	44
3.3.1	Antenna Simulation	44
3.3.2	Power Combiner Simulation	46
3.3.3	Voltage Multiplier Simulation	48
3.4	Summary	49

CHAPTER 4 RESULTS AND DISCUSSION

4.1	Introduction	50
4.2	Simulation Result	50
4.2.1	Antenna Simulation Result	51
4.2.2	Power Combiner Simulation Result	56
4.2.3	Voltage Multiplier Simulation Result	62
4.3	Discussion	60

4.4	Summary	63
-----	---------	----

CHAPTER 5 CONCLUSION

5.1	Summary and Conclusion	64
-----	------------------------	----

5.2	Recommendations for Future Work	66
-----	---------------------------------	----

	REFERENCES	67
--	-------------------	----

	APPENDIX A	70
--	-------------------	----

	APPENDIX B	71
--	-------------------	----

	APPENDIX C	82
--	-------------------	----

© This item is protected by original copyright

LIST OF TABLES

NO.		PAGE
3.1	Manual calculation of parameters of patch antenna	37
3.2	Calculated quantity of antenna on the output	38
3.3	Specifications for matching network	41
3.4	Calculated parameters of power combiner	42
4.1	Effect of input multiplier circuit on the output voltage	60
4.2	Effect of capacitor value in multiplier circuit on the output voltage	61
4.3	Effect of multi stage in voltage multiplier on the output voltage	61

© This item is protected by original copyright

LIST OF FIGURES

NO.		PAGE
1.1	General structure of RF energy harvesting system	2
2.1	Energy sources	8
2.2	Block diagram of RF harvester system	12
2.3	Helical antenna	14
2.4	Pyramidal horn antenna	15
2.5	Reflector antenna	16
2.6	Microstrip patch antenna	18
2.7	Illustration microstrip line	20
2.8	The Wilkinson power combiner	21
2.9	Type of matching circuit in rectifier	24
2.10	Half wave rectifier	24
2.11	Full wave rectifier	25
3.1	Dissertation flow chart	32
3.2	Patch layout	34
3.3	Input impedance calculation by CST Microwave software	36
3.4	Combiner output process	37
3.5	Design for 64 antennas array	39
3.6	A basic combiner design of Wilkinson	40
3.7	LineCalc in ADS 2009	42
3.8	Design of six-stage voltage multiplier circuit	43
3.9	Front view	45

3.10	Perspective view	45
3.11	Bottom view	45
3.12	Top view	46
3.13	One stage power combiner	46
3.14	Layout one-stage power combiner	47
3.15	Three-stage power combiner	47
3.16	Layout three-stage power combiner	48
4.1	Return loss of microstrip patch antenna	51
4.2	The minimum magnitude of antenna	52
4.3	The maximum magnitude of antenna	52
4.4	Radiation pattern of antenna	53
4.5	3D radiation pattern	54
4.6	Voltage Standing Wave Ratio (VSWR)	55
4.7	Simulation result for first stage power combiner without output port	56
4.8	Simulation result for first stage power combiner with output port	57
4.9	Simulation result for three stages power combiner	58
4.10	Output for six stages voltage multiplier	59
4.11	Output for three stages voltage multiplier	59

LIST OF ABBREVIATIONS

DC	Direct Current
AC	Alternating Current
RF	Radio Frequency
FR	Flame Retardant
ADS	Advance Digital System
ISM	Industrial, Scientific and Medical
MOSFET	Metal-Oxide Semiconductor Field Effect Transistor
NASA	National Aeronautics and Space Administration
CMOS	Complementary Metal Oxide
PET	Polyethylene Terephthalate
IEEE	Institute of Electrical and Electronic
AM	Air Mas Coefficient
OEFS	Opto-electric Field Sensor
PV	Photovoltaics
GSM	Global System for Mobile Communications
WSN	Wireless Sensor Network
WLAN	Wireless Local Network
WiMAX	Worldwide Interoperability for Microwave Access
3G	Third-Generation
MWS	Microwaves
PCB	Printed Circuit Board

© This item is protected by original copyright

LIST OF SYMBOLS

Hz	Unit of frequency
V	Voltage
V _{rms}	Root Mean Square Voltage
R	Resistance
dB	Decibel
dBm	Decibels-meter
dB _i	Decibels-isotropic
L	Length
ℓ	Inset length
l	Line length
D	Diameter
S	Spacing of inner winding
C	Circumference of helix
Ω	Ohm
°C	Degree Celsius
α	Pitch angle
a	Radius
f	Frequency
ϵ	Dielectric constant
ϵ_e	Effective dielectric

ϵ_r	Dielectric permittivity
ϵ_{reff}	Effective relative permittivity of dielectric
C	Capacitance
c	Speed of sound in the air
W	Width
H	Height
d	Thickness
Z_0	Impedance
λ	Wavelength
μ	Permeability in free space
β	Phase constant
G_1	Microstrip radiator conductance
G_2	Mutual conductor between the two slot
I_1	Current into microstrip
N	Number of antenna
k_c	Cutoff wave number

Penuaian Frekuensi Radio Untuk Bekalan Mudahalih Arus Terus

ABSTRAK

Projek ini menekankan pada rekabentuk rectenna pada frekuensi 2GHz dengan penuaian isyarat frekuensi radio. Isyarat 2GHz adalah merupakan isyarat bagi rakaian 3G dan lebar jalur ISM yang mudah didapati di kawasan bandar. Rectenna adalah gabungan beberapa antenna mikrojalur jenis segiempat tepat, litar gabungan kuasa dan litar gandaan voltan. Antenna ini telah direkabentuk menggunakan perisian CST Microwave Studio 2012. Antara parameter yang diukur melalui proses simulasi adalah: kadar kehilangan balikan lebar jalur, lebar jalur galangan, bentuk radiasi, nisbah gelombang berdiri, gabungan masukan dan pengutuban. Litar gabungan kuasa telah direkabentuk menggunakan kuasa pemisah jenis Wilkinson. Satu gabungan kuasa bagi tiga-peringkat dengan 64 masukan telah dicadangkan, direkabentuk dan dinilai. Perlaksanaan ini telah dilakukan dengan menggunakan proses simulasi menggunakan perisian ADS 2009. Dua, tiga dan enam-peringkat litar gandaan voltan telah direkabentuk dan dinilai juga menggunakan perisian yang sama. Selepas merekabentuk dan melakukan simulasi, beberapa keputusan telah diperolehi. Rekabentuk antenna yang telah disimulasi mempunyai kehilangan balikan sebanyak 44.4dB dengan lebar jalur galangan sebanyak 400MHz, nisbah gelombang berdiri pula mempunyai nilai nisbah sebanyak 1.01:1, manakala nilai bagi galangan masukan mempunyai sebanyak 50Ω , dan arah pengutuban untuk bentuk radiasi adalah 6.202dBi. Perincian terhadap kuasa gabungan telah dilakukan dan keputusan bagi simulasinya dibentangkan. Rekabentuk bagi litar gabungan kuasa telah disimulasi dan memperolehi 9dB dari faedah keluar terhadap tiga-peringkat gabungan kuasa. Manakala keputusan bagi enam-peringkat gandaan voltan yang telah disimulasi mempunyai voltan keluaran sebanyak 3.901V dengan setiap voltan masukan sebanyak 1V. Kuasa yang dihasilkan oleh penuai ialah 20 mW. Walaubagaimanapun, didapati masih terdapat gangguan yang dipaparkan dari olahan di graf. Olahan ini boleh dikurangkan dengan penambahan nilai kapasitor yang lebih tinggi. Kesimpulannya, rekabentuk yang dicadangkan ini telah berjaya direkabentuk dan keputusan dari simulasi telah diperolehi mengikut spesifikasi yang ditetapkan.

RF Harvester for DC Supply

ABSTRACT

This project focuses on the design of 2GHz rectenna for harvesting RF signal. This 2GHz signal is from a 3G signal and ISM band that is easy to be found in town areas. The rectenna comprises an array of rectangular patch of microstrip antenna, power combiner and voltage multiplier. Patch antenna was designed using a CST Microwave Studio 2012. The following parameters: return loss, bandwidth, radiation pattern, voltage standing wave ratio (VSWR), input impedance and antenna polarization were obtained from simulation. The power combiner circuit was designed using a Wilkinson power splitter. A power combiner for six stages and 64 inputs was proposed, designed and evaluated. The performance was done by simulation using ADS 2009 software. Two multipliers, three and six stages voltage multiplier were designed and evaluated using the same software. After designing and simulating, the following results were obtained. The designed antenna was simulated and it obtained 44.4dB of return loss with 400MHz of bandwidth, 1.01:1 of VSWR, 50 Ω input impedance and 6.202dBi of directivity for the radiation pattern. A full analytical study of power combiner was done and simulation results are presented. The design of the power combiner obtained a 9dB output gain for three stages power combiner. A six-stage voltage multiplier has been simulated and it had a 3.901V of output voltage for the input voltage of 1V. The power produced by the harvester is 20mA. However, there were some harmonics shown by the ripples on the graph. The ripples can be reduced by adding the capacitor of a higher value. In conclusion, the proposed designs have been successfully designed and the simulated results have been obtained within the specifications.

CHAPTER 1

INTRODUCTION

1.1 Introduction

The common types of energy sources such as solar and wind are both renewable and conventional energy sources. Radio Frequency (RF), vibration, temperature gradient, thermoelectric and acoustic are not common energy sources. Some of these energy sources are only available in ambient quantities that will not be able to supply sufficient energy to power useful system without some forms of voltage condition (Sika Shrestha, 2013). Even those which are available in large useful quantity would still require a conversion to become a useful electrical form. The technology used to capture the condition and the use of these energy sources was not known until recently. This technology is being referred as energy harvesting (Soudeh, 2010).

The definition of energy harvesting is the process of scavenging ambient amount of energy from the environment, accumulating it and storing it for later use. Energy harvesting devices are used to trap or capture these ambient energies efficiently and effectively before being stored for immediate or later use. The stored

energies are processed and managed, and later being supplied in a form that could perform useful tasks (N.M. Din, 2012).

The energy harvesting devices perform this harvesting task using diverse forms of sensors and control circuits. An energy harvesting device charges up a super capacitor or a rechargeable battery that is used to power the sensor nodes or the RF transceivers. Part of the advantages of energy harvesting are increased efficiency with recent technical developments, cheaper, and free maintenance; can be used as a backup generator in power systems; can be used as independently as in the traditional plug-based electricity sources (S. Sheik Mohammed, 2010).

However, in this research, the RF will be further discussed. Nowadays, converting an RF signal to a DC electrical current is one of the sophisticated technologies in communication. RF energy can be harvested from the air and processed to achieve levels of energy to charge up a low-power electronic circuit. However, the ability of an RF energy harvester to maintain efficiency of the RF for a DC conversion is an important performance aspect.

This project focuses on the design of an RF harvest for DC supply that operates in the 2GHz 3G mobile network or the ISM Band. The reason of choosing 2GHz is the state of being rare for researchers to actually harvest this frequency range in their project. Some researchers are interested to harvest on the 2.4GHz and above frequency because they are a lot easier to be captured by the antenna in maximum amount. This project does not come with any demonstrator. It is exclusively developed with software to estimate the performance through simulation. Then, the characterization from the simulation is reported. The basic architecture of

the RF harvester is presented in Figure 1.1. The technique significantly reduces the costs of replacing batteries periodically.

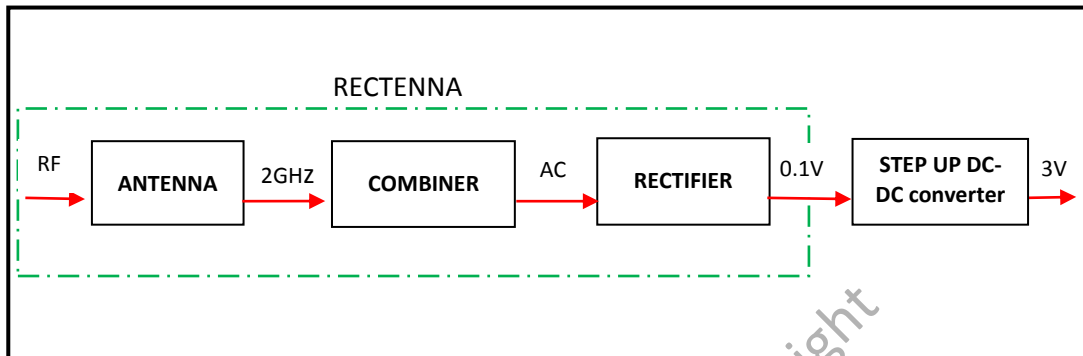


Figure 1.1: General structure of RF energy harvesting system

1.2 Problem Statement

Nowadays, many electronic devices have been miniaturized and powered by batteries. However, these devices need to be recharged periodically, and in the end it will be used up and need to be replaced by new ones. The batteries then will become the waste and will pollute the earth. The solution to solve this problem is to harvest the energy from the environment and to use it to charge the batteries or to use it directly to power up the electronic circuit. However the ambient RF would be from broadcasting stations such as TV, radio and mobile phone base stations. The signal received is very small which around -40 to -60dBm. A special antenna should be designed in order to amplify the signal to be more than 0.5V as to operate the rectifying diode circuit.

1.3 Research Objectives

The research objectives are given below:

- i. To design and to simulate the microstrip patch antenna.
- ii. To design a power combiner for 64 antennas.
- iii. To design and to simulate a voltage multiplier circuit that can be used to convert the harvested energy from ambient radio frequency to DC voltage.

In order to achieve these objectives, the Advance Digital System and CST Microwave software are used as the simulation tool. The result and the performance of the antenna and the rectifier were investigated.

1.4 Scope of Project

The scopes of the project aim to design an antenna to pick up 2GHz low RF energy. The input impedance matching is at 50Ω . The simulation of patch antenna needs to be done using CST Microwave Studio Suite 2009.

The next stage is to design a power combiner. This combiner needs to be newly designed, and should consists of 64 antennas. The circuit is used to combine the sources of the antenna before converting them into DC using voltage multiplier (rectifying and stepping up the voltage). Next is to design the voltage multiplier circuit that is used to convert the harvested energy from the ambient radio frequency to DC voltage. Firstly, the components were chosen to suit the Dickson circuit. A

model of a rectifier consists of a capacitor and a diode is selected from the electronic datasheet. Then, the components and the circuit need to be simulated to perform the circuit in order to function and give an output above 3V. The design of the electronic circuit and the power combiner will be done via the Advance Digital System (ADS) 2009.

1.5 Thesis Outlines

This dissertation is organized into five chapters to report on the whole research activities and to discuss on radio frequencies that can be harvested using the matching network between the antenna, the combiner and the electronic circuit.

Chapter 1 discusses the introduction of the project. This part also includes the objectives, as a guideline to complete the project, followed by the discussion on the problem statement of the project and lastly, the scope of the project is discussed on designing the electronic circuit and the power combiner of the antenna.

Chapter 2 is a review of related literatures of previous projects on RF harvester. This chapter will explain the analysis of the ambient RF energy harvesting techniques according to various methods. All the information in this chapter is based on the related journals and conferences. It discusses the advantages and disadvantages of the current work and also the improvement of that particular work. This chapter is truly important in giving some idea to complete the analysis.

Chapter 3 discusses about the methodology and the overall project to complete the analysis. There is a flowchart of the progress of this project, and also the

explanation on the process of simulation using software ADS 2009 and CST Microwave Studio 2012.

The results, the analysis, and the discussion is explained in Chapter 4. The result of the simulation will be arranged in tables and figures for each bus test system. There is also a graph to simplify the analysis of the results.

Finally, Chapter 5 includes the conclusion and the recommendations. This chapter discusses the improvement of the project and the achievement of the project objectives. Some recommendations are also discussed to give some idea to conduct further research on the analysis.

© This item is protected by original copyright

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

In the late 19th century, wireless power transmission started off as an alternative to the transmission line for the power distribution. In early 1891, the first person that had conceived the idea for the Wireless Power Transmission and had demonstrated the “transmission of electrical energy without wires was Nikola Tesla. He was known as “Father of Wireless”. Two years later, at the World Columbian Exposition in Chicago, Tesla had demonstrated the illumination of vacuum bulbs without using any wires for the power transmission (S.Sheik Mohammed, 2010). His idea was fabricated and was constructed into a tower for the wireless transmission of electrical power rather than for telegraphy, which is later known as the Wardenclyffe Tower.

In 1961, William C. Brown invented a rectenna which directly converts microwaves to DC current. In 1964, Brown demonstrated the ability of a rectenna by powering a helicopter solely using microwaves (S.Sheik Mohammed, 2010). He has contributed a lot to the modern development of microwave power transmission. In 1982, Brown and James F.Trimer developed a thin film plastic rectenna using printed circuit technology that weighed only one-tenth of the previous one. Stationary High