



**DEVELOPMENT AND ANALYSIS OF WEARABLE  
TEXTILE ANTENNA (WTA) DESIGN FOR ISM AND  
HIPERLAN APPLICATIONS**

by

**NURUL HUSNA BINTI MOHD RAIS  
(0830810262)**

A thesis submitted  
In fulfillment of the requirements for the degree of  
Master of Science (Communication Engineering)

**School of Computer and Communication Engineering  
UNIVERSITI MALAYSIA PERLIS**

2012

## ACKNOWLEDGEMENT

Alhamdulillah. Thanks to Allah SWT, the One who giving me the opportunity to complete my research project. I would like to express my gratitude to everyone, who helped until I successfully completed my research. My supervisor, Dr. Mohd Fareq bin Abd. Malek and my co-supervisor Mr. Soh Ping Jack gave excellent guidance throughout my research. Thank you for their full support and encouragement.

I would like to thank my parents; Mohd Rais bin Md Isa and Roohana binti Husaini and all my family for their understanding, patience, full support and constant encouragement along the duration I'm doing this project.

Deepest thanks and appreciation to all my colleagues, Saidatul Norlyana, Ezanuddin, Wee Fwen Hoon, Nikman and others for their cooperation, constructive suggestion and support. I really appreciate their helping hand to accelerate the progress of the project until it completed. Thanks to other Embedded Computing Cluster members, for their cooperation and contribution.

Last but not least I also would like to acknowledge Universiti Malaysia Perlis (UniMAP) Short Term Research Grant Scheme (Grant No: 9001-00141) and Ministry of Highest Education (MOHE) for the financial support.

# UNIVERSITI MALAYSIA PERLIS

## DECLARATION OF THESIS

Author's full name : NURUL HUSNA BINTI MOHD RAIS  
Date of birth : 17 MAY 1984  
Title : DEVELOPMENT AND ANALYSIS OF WEARABLE TEXTILE  
ANTENNA (WTA) DESIGN FOR ISM AND HIPERLAN  
APPLICATIONS  
Academic Session : 2009/2010

I hereby declare that the thesis becomes the property of Universiti Malaysia Perlis (UniMAP) and to be placed at the library of UniMAP. This thesis is classified as :

- CONFIDENTIAL** (Contains confidential information under the Official Secret Act 1972)\*
- RESTRICTED** (Contains restricted information as specified by the organization where research was done)\*
- OPEN ACCESS** I agree that my thesis is to be made immediately available as hard copy or on-line open access (full text)

I, the author, give permission to the UniMAP to reproduce this thesis in whole or in part for the purpose of research or academic exchange only (except during a period of \_\_\_\_ years, if so requested above).

Certified by:

\_\_\_\_\_  
**SIGNATURE**

840517-08-5484

\_\_\_\_\_  
**SIGNATURE OF SUPERVISOR**

DR. MOHD FAREQ BIN ABD. MALEK

**(NEW IC NO. / PASSPORT NO.)**

**NAME OF SUPERVISOR**

**NOTES** : \* If the thesis is CONFIDENTIAL or RESTRICTED, please attach with the letter from the organization with period and reasons for confidentiality or restriction.

**GRADUATE SCHOOL  
UNIVERSITI MALAYSIA PERLIS  
PERMISSION TO USE**

In presenting this thesis in fulfillment of a post graduate degree from the Universiti Malaysia Perlis, I agree that permission for copying of this thesis in any manner, in whole or part, for scholarly purpose may be granted by my supervisor(s) or, in their absence, by the Dean of the Graduate School. It is understood that any copying or publication or use of this thesis or part thereof for financial gain shall not be allowed without my written permission. It is also understood that due recognition shall be given to me and Universiti Malaysia Perlis, for any scholarly use which may be made of any material from my thesis.

Requests for permission to copy or to make other use of material in this thesis in whole or in part should be addressed to:

**Dean of Graduate School  
Universiti Malaysia Perlis (UniMAP)  
No, 112 & 114 (Tingkat Atas)  
Taman Pertiwi Indah, Jalan Kangar – Alor Setar**

**Seriab 01000 Kangar**  
**Perlis**  
**TABLE OF CONTENTS**

	<b>PAGE</b>
<b>ACKNOWLEDGMENT</b>	ii
<b>APPROVAL AND DECLARATION SHEET</b>	iii
<b>PERMISSION TO USE</b>	iv
<b>TABLE OF CONTENTS</b>	v-viii
<b>LIST OF TABLES</b>	ix
<b>LIST OF FIGURES</b>	x-xiii
<b>LIST OF SYMBOLS</b>	xiv-xv
<b>LIST OF ABBREVIATIONS</b>	xvi
<b>ABSTRAK (BAHASA MELAYU)</b>	xvii
<b>ABSTRACT (ENGLISH)</b>	xviii
<b>CHAPTER 1 INTRODUCTION</b>	
1.1 Overview	1
1.2 Problem Statement	4

1.3	Research Objective	5
1.4	Research Scope	6
1.5	Thesis Outline	6
<b>CHAPTER 2 LITERATURE REVIEW</b>		
2.1	Introduction	7
2.2	Types of Wearable Antenna	8
	2.2.1 Conventional Wearable Antenna	8
	2.2.2 Wearable Textile Antenna	8-11
2.3	Suspended Plate Antenna	12-16
2.4	Techniques to Enhance Impedance Bandwidth	17
	2.4.1 Slotted Patch: U-shaped slot and E-shaped slot	17-18
	2.4.2 Low permittivity and thick dielectric substrate	19
	2.4.3 Shorting post	20
2.3	Conductive Textile Material	20
2.4	Challenges in Wearable Antenna Design	23
	2.4.1 Requirements for Wearable Antenna Design	23
	2.4.2 Analysis Required for Wearable Antennas	24
	2.4.2.1 Specific Absorption Rate (SAR) modeling	24-26
	2.4.2.2 Measurement with different bending portion	26-27
	2.4.2.3 On body measurements	27-28
2.5	Fundamental Antenna Parameters	29
	2.5.1 Reflection Coefficient, Return Loss and Voltage Standing Wave Ratio	29-31
	2.5.2 Bandwidth of an antenna	31-32
	2.5.3 Radiation Pattern	33
	2.5.4 Efficiency	34
	2.5.5 Directivity	35
	2.5.6 Gain	36
	2.5.7 Specific Absorption Rate (SAR)	37

2.6	Summary	38
-----	---------	----

### **CHAPTER 3 METHODOLOGY**

3.1	Introduction	39
3.2	Development of Wearable Textile Antenna (WTA)	39
3.3	Design Procedure	45
3.3.1	Textile Conductivity Calculation	45
3.3.2	Antenna substrate	45-46
3.3.3	Rectangular Microstrip Patch Design	46-48
3.3.4	Slots and Slits	49-50
3.3.5	Probe Feed Location	51-53
3.3.6	Shorting Post	54
3.4	Fabrication Process	55
3.4.1	Generating Layouts	55-56
3.4.2	Antenna Dimensioning	57
3.4.3	Probe Feed and Shorting Post Placement	58-59
3.5	Measurements	60
3.5.1	Return Loss Measurement Setup	60-63
3.5.2	Radiation Pattern Measurement Setup	64-66
3.6	Summary	66

### **CHAPTER 4 RESULT AND DISCUSSION**

4.1	Introduction	67
4.2	Parametric Analysis of the WTA Design	68
4.2.1	Probe Feed Location	68-69
4.2.2	U-Slot Length	70-72

4.2.3	Presence of Slits (SlitL and SlitW)	72-73
4.2.4	Shorting Posts	74-75
4.2.5	Substrate Height and Dielectric Constant	75-77
4.2.6	Ground Plane Size	77-78
4.2.7	Different Conductive Textiles	78-79
4.2.8	Square L-slot Antenna Design	80-81
4.3	$S_{11}$ Result of the Antenna	81
4.3.1	Antenna in Free Space	82
4.3.2	Antenna Mounted On Body	83-86
4.3.3	Antenna under Different Bending Direction	86-91
4.4	Far field Pattern	92
4.4.1	Simulated Radiation Pattern on free space	92-93
4.4.2	Simulated Radiation Pattern for the antenna on different parts of body.	94-98
4.4.3	Measured Radiation Pattern	99-100
4.5	Gain, Directivity and Efficiency	100-102
4.6	Current Distribution	103-105
4.7	Evaluation of Specific Absorption Rate (SAR)	106-109
4.8	Summary	110

## **CHAPTER 5 SUMMARY AND FUTURE WORK**

5.1	Summary	111
5.2	Future Work	113

<b>REFERENCES</b>	114-118
-------------------	---------

## **APPENDICES**

<b>Appendix A : Measurement Equipment</b>	119-124
---	---------



<b>Appendix B</b> : Data sheet Conductive Textile	125-127
<b>Appendix C</b> : Workflow Evaluating SAR Calculation	128-132
<b>LIST OF PUBLICATIONS/EXHIBITIONS</b>	133-136

© This item is protected by original copyright

## LIST OF TABLES

NO.		PAGE
2.1	Parameters of Conductive Textile	21
3.1	Material Specifications of Wearable Textile Antenna (WTA)	42
3.2	Design Specifications of Wearable Textile Antenna (WTA)	43
3.3	Calculated antenna parameters	48
3.4	Calculations to determine antenna's feed point location at 2.45 GHz.	53
4.1	WTA's bandwidth with different U-slot lengths	72
4.2	Bandwidths of WTA with and without shorting post.	75
4.3	Material Properties of Conductive Textiles	79
4.4	Simulated and measured bandwidth results of the WTA design on arm, chest and rear part.	86
4.5	Bandwidth of simulated and measured $S_{11}$ result for the WTA design with different bending radius for E-plane and H-plane direction.	91
4.6	Simulated and measured Gain, Efficiency, Directivity, Radiation Efficiency and Total Efficiency of the Antenna	91
4.7	Simulated gain and efficiency of the antenna on different part of body.	102
4.8	Table 4.8: Dielectric constant ( $\epsilon_r$ ) and conductivity ( $\sigma$ ) of human tissue at 2.45 GHz and 5.35 GHz.	107
4.9	SAR Result for Different Part of Body.	109

## LIST OF FIGURES

NO.		PAGE
1.1	Organisation of IEEE 802.15 Wireless PAN Group	2
2.1	Construction of the PIFA	9
2.2	Possible placement of the PIFA antenna	9
2.3	The geometry and dimensions of the flexible PIFA for Bluetooth	10
2.4.	Three bend of CPW fed flexible antenna with straight, spiral and curve shapes	11
2.5	Geometry and dimension of HMMPA.	12
2.6	Antenna with 50Ω lien feed fabricated on PCB	13
2.7	View of the dual band textile antenna and side view of the antenna	14
2.8	Geometry of the rectangular ring textile antenna	15
2.9	Geometry and dimensions of the dual band E-shaped textile antenna on felt fabric	16
2.10	Geometry of a suspended plate antenna.	17
2.11	Geometry of U-shaped slot antenna	18
2.12	The geometry of the U-shaped slot patch antenna	18
2.13	Geometry of E-shaped Patch	19
2.14	Structure of Shorted Microstrip Patch	20
2.15	Sample of Conductive Textile from left (a) Veilshield, b) Zelt, (c) Electron, and (d) Shieldit Super.	22
2.16	Computed SAR distributions at 2.2 GHz	25
2.17	SAR distribution of the antenna located around limb of human	26
2.18	Measurement setup of the antenna	27
2.19	Fabricated textile patch antenna placed conformal on the (a) human chest and (b) arm for experimental analysis on the body effect on antenna performance	28
2.20	Measurement setup for on-body measurement	28

2.21	Illustration of reflection at discontinuity	30
2.22	Bandwidth determination	32
2.23	Radiation Pattern illustration of the directive antenna.	34
3.1	Basic configuration of suspended plate antenna (SPA).	40
3.2	Antenna dimensions with $L_p = 60$ mm, $W_p = 45$ mm, $L_g = 100$ mm and $w_g = 80$ mm.	41
3.3	Research methodology flow chart.	44
3.4	Rectangular suspended plate antenna.	49
3.5	Utilization of Slit <sub>L</sub> , Slit <sub>W</sub> and U-slot on the radiating patch.	49
3.6	Antenna's top view with probe feed location.	52
3.7	Side view of the antenna showing the position of the shorting post.	54
3.8	Exporting CST antenna layout as a Gerber file.	56
3.9	Antenna Layout (a) Layout in Gerb tool Software (b) Printed Antenna Layout	56
3.10	Fabrication of the antenna using hand cut.	57
3.11	Conductive epoxy.	58
3.12	Conductive thread.	59
3.13	Fabricated WTA prototype.	59
3.14	Measurement setup for return loss measurement.	60
3.15	Antenna mounted on (a) Chest (b) Arm and (c) Rear part of body.	61
3.16	HUGO Model	62
3.17	Antenna wrapped on the cylindrical polystyrene (a) E-plane bending direction (b) H-plane bending direction.	63
3.18	Layout for radiation pattern measurement setup.	65
3.19	View inside the OTA-300 anechoic chamber.	66
4.1	Position of the feed point on the rectangular patch.	68
4.2	Simulated $S_{11}$ result with different feed point locations.	69
4.3	Position of the feed point from antenna edges.	69

4.4	Top view of the antenna showing the U-slot length.	70
4.5	Simulated $S_{11}$ result with different U-slot lengths.	71
4.6	Top view of proposed antenna design.	73
4.7	Simulated $S_{11}$ result with slits.	73
4.8	Simulated $S_{11}$ result with and without shorting posts.	74
4.9	Simulated $S_{11}$ result with different values of dielectric constant, $\epsilon_r$ .	76
4.10	Simulated $S_{11}$ result with different substrate heights, $h = 3\text{ mm}$ , 4 mm, 5 mm, and 6 mm.	77
4.11	Simulated $S_{11}$ result with a variation of ground plane sizes.	78
4.12	Simulated $S_{11}$ result using different types of conductive textiles.	79
4.13	Geometry of the square L-slot textile antenna	80
4.14	Simulated $S_{11}$ result of the WTA design and Square L-slot antenna	81
4.15	Simulated and measured $S_{11}$ result in free space	82
4.16	Antenna location at different parts of the body (a) arm, (b) chest and (c) rear part of body.	83
4.17	(a) Simulated and (b) measured $S_{11}$ result at different parts of the body.	85
4.18	Antennas bended around cylinders in (a) E-plane direction and (b) H-plane direction.	87
4.19	Simulated and measured $S_{11}$ result for Different Bending Radiusi for E-plane direction.	89
4.20	Simulated and measured $S_{11}$ result for different bending radius for H-plane direction.	90
4.21	Simulated 3D and 2D pattern at 2.45 GHz and 5.35 GHz.	93
4.22	Simulated 3D and 2D radiation pattern for (i) 2.45 GHz and (ii) 5.35 GHz of the antenna placed on body.	96
4.23	Simulated 3D and 2D radiation pattern for (i) 2.45 GHz and (ii) 5.35 GHz of the antenna placed on chest.	97
4.24	Simulated 3D and 2D radiation pattern for (i) 2.45 GHz and (ii) 5.35 GHz of the antenna placed on rear part of body.	98

4.25	Measured 3D radiation pattern for 2.45 GHz (a) Top view, (b) bottom view, (c) side view.	99
4.26	Measured 3D radiation pattern for 5.35 GHz (a) Top view, (b) bottom view, (c) side view.	100
4.27	Simulated surface current distribution for 2.45 GHz rectangular patch.	101
4.28	Simulated surface current distribution on the radiating patch for the WTA antenna at (a) 2.45 GHz and (b) 5.35 GHz	105
4.29	Calculated SAR averaged over 10g of human tissue as observed on different part of human body (a) Arm, (b) Chest and (c) rear part of body.	108

© This item is protected by original copyright

## LIST OF SYMBOLS

$\epsilon$	Electric permittivity (farads/meter)
$\mu_o$	Permeability of air
$\eta_{total}$	Total efficiency
$\sigma$	Electric conductivity (Siemens/meter)
$\delta$	Loss tangent of dielectric material
$\epsilon_r$	Relative Permittivity
$\epsilon_{eff}$	Effective Relative Permittivity
$\chi$	wavelength
$\rho$	Density of body tissues [kg/m <sup>3</sup> ]
$\Gamma$	Reflection coefficient
BW	Bandwidth
$C$	Maximum transmit data rate,
$c$	Velocity of light waves in free space
$D$	The electric flux density
$D$	Directivity
$E$	The electric field intensity
$f$	Frequency
$fU$	Upper frequency
$fL$	Lower frequency
$fC$	Center frequency
G	Gain

$G_t$	Antenna receiver gain
$G_s$	Antenna transmitter gain
$h$	The height of the radiating plate
$H$	The magnetic field intensity,
$J$	The electric current density
$L$	The geometric shape of the radiating element (length)
$L_p$	Patch length
$L_g$	Length of the ground plane
$P_t$	Received power on antenna receiver
$P_s$	Received power on antenna transmitter
$P_{rad}$	Total radiated power
$R_{in}$	The location and structure of the feeding stem
$R_{radiated}$	Radiation resistance
$R_L$	Loss resistance
$U$	Radiation intensity
$W$	The geometric shape of the radiating element (width)
$W_p$	Width of the radiating patch
$W_g$	Width of the ground plane
$W_{stored}$	Stored Energy
$Z_0$	Characteristic impedance
$Z_L$	Arbitrary load



## LIST OF ABBREVIATIONS

BAN	Body Area Network
EBG	Electromagnetic band gap
EM	Electromagnetic
HiperLAN	High Performance Radio Local Area network
ISM	Industrial, Science, Medical
PAN	Personal Area Network
Q	Quality factor
SAR	Specific Absorption Rate
SPA	Suspended Plate Antenna
WBAN	Wireless Body Area Network
WLAN	Wireless Local Area Network
WPAN	Wireless Personal Area Network
WTA	Wearable Textile Antenna

# **Pembangunan dan Analisis Reka bentuk “Wearable Textile Antenna (WTA)” untuk Aplikasi ISM dan HiperLAN**

## **ABSTRAK**

Sejak kebelakangan ini, kepentingan penggunaan antenna tekstil yang boleh diguna pakai untuk aplikasi “Body Area Network (BAN)” telah mula berkembang. Dengan kewujudan tekstil yang bersifat konduktif ini membolehkan pembinaan struktur antenna boleh dipakai menjadi ringan dan fleksibel yang diperbuat sepenuhnya daripada tekstil. Antena yang dicadangkan ini direka dan dioptimumkan untuk aplikasi ISM (Industri, Sains dan Perubatan) dan HiperLAN (High Performance Radio LAN), dimana, masing-masing mempunyai julat frekuensi 2400 hingga 2480 MHz dan 5150 hingga 5750 MHz. Sebelum ini, reka bentuk antenna mikrostrip yang biasa diguna pakai menggunakan “printed circuit board (PCB) laminates” adalah tidak dapat memenuhi prasyarat “Body Area Network (BAN)” iaitu fleksibel dan boleh berubah bentuk. Sebaliknya, antenna yang dicadangkan dalam penyelidikan ini telah direka menggunakan tekstil konduktif, yang dibina menggunakan gabungan gentian polimer / logam yang konduktif dan gentian normal. Prosedur reka bentuk “Wearable Textile Antenna (WTA)” bermula dengan takrif spesifikasi, pemilihan bahan, simulasi menggunakan perisian CST Microwave Studio dan akhirnya, reka bentuk prototaip dan pengukuran. Oleh kerana proses fabrikasi yang digunakan adalah manual, antenna ini telah direka bentuk semudah yang mungkin. Bentuk asas segi empat tepat yang dicadangkan ini kemudian ditambah baik lagi dengan menggunakan lubang alur dan belahan untuk membolehkan penghasilan getaran dua jalur dan melebarkan jalur lebar. Konsep reka bentuk struktur utama adalah berasaskan antenna plat -  $60 \times 45$  mm segi empat tepat digantung di atas  $80 \times 60$  mm lapisan bumi menggunakan 5 mm busa substrat. Antena ini juga telah menjalani beberapa ujian penyelidikan untuk menentukan prestasi keseluruhan.

## **Development and Analysis of Wearable Textile Antenna (WTA) Design for ISM and HiperLAN Applications**

## ABSTRACT

In recent years, there has been growing interest in utilizing wearable textile antennas for Body Area Network (BAN) antenna applications. Availability of conductive textiles allowed manufacturing of light-weight and flexible wearable antennas made entirely out of textiles. The proposed antenna is designed and optimized for both ISM (Industrial, Science and Medical) and HiperLAN (High Performance Radio LAN) applications, where operating frequency ranges from 2400 to 2480 MHz and 5150 to 5750 MHz, respectively. Previously, conventional microstrip antenna designs fabricated using rigid printed circuit board (PCB) laminates are unable to conform to BAN's flexibility and deformity prerequisites. On the contrary, the proposed antenna in this investigation is fabricated using conductive textiles, which are built using a combination of conductive polymer/metal fibers and normal fibers. The development procedure of this Wearable Textile Antenna (WTA) starts with its specification definition, materials selection, simulation using CST Microwave Studio software and finally, design prototyping and measurements. Due to the manual fabrication procedure employed, the antenna designed is to be as simple as possible. The proposed basic rectangular radiator is then improved using slots and slits to enable dual-band resonance and broad bandwidths. Its main structural design concept is based on a suspended plate antenna - a  $60 \times 45$  mm rectangular radiating element is suspended over a  $80 \times 60$  mm ground plane using a 5 mm foam substrate. The antenna has undergone several investigations to ascertain its overall performance. Performance of the antenna investigated in free space, placements on different body locations and under different bending radii.  $S_{11}$ , gain and efficiency of the antenna in free space and in proximity of human body showed good agreements, indicating design robustness under various operating conditions.

# CHAPTER 1

## INTRODUCTION

### 1.1 Overview

In recent years, body centric wireless communication has experienced rapid growth, in line with the vision of wearable computing, which describes future electronic systems as an integral part of everyday clothing. Wearable computing can be seen as a part of the wireless body area network (WBAN). Body area network (BAN) is natural progression from the personal area network (PAN) concept, consisting of a number of nodes and units. Each node is placed on, or in close proximity of the body for the purpose of inter- and intra-body information transmission and relay. These inter- and intra-body nodes can be classified as on-body, off-body and in-body communication (Hall, 2006). On-body communications describe the link between body mounted devices communicating wirelessly. Off-body communication define the radio link between body worn devices and base units or mobile devices located in the surrounding environment. In-body communication is concerned with relaying and exchanging information between wireless implants and on body nodes.

Body centric wireless networks operate in the unlicensed portions of the spectrum. Industrial, science and medical (ISM) band, ranging from 2.40 – 2.48 GHz is unlicensed

band under the WBAN and WPAN standards. Typically, a WPAN permits communication within a very short range (around 10 m) which could enable the application of wearable computing devices. Such technologies are Bluetooth, which used as the basis for a new standard, IEEE 802.15 and Ultra wideband (UWB). Figure 1.1 shows the organization of IEEE 802.15 Wireless PAN group (Alfvín, 2003).

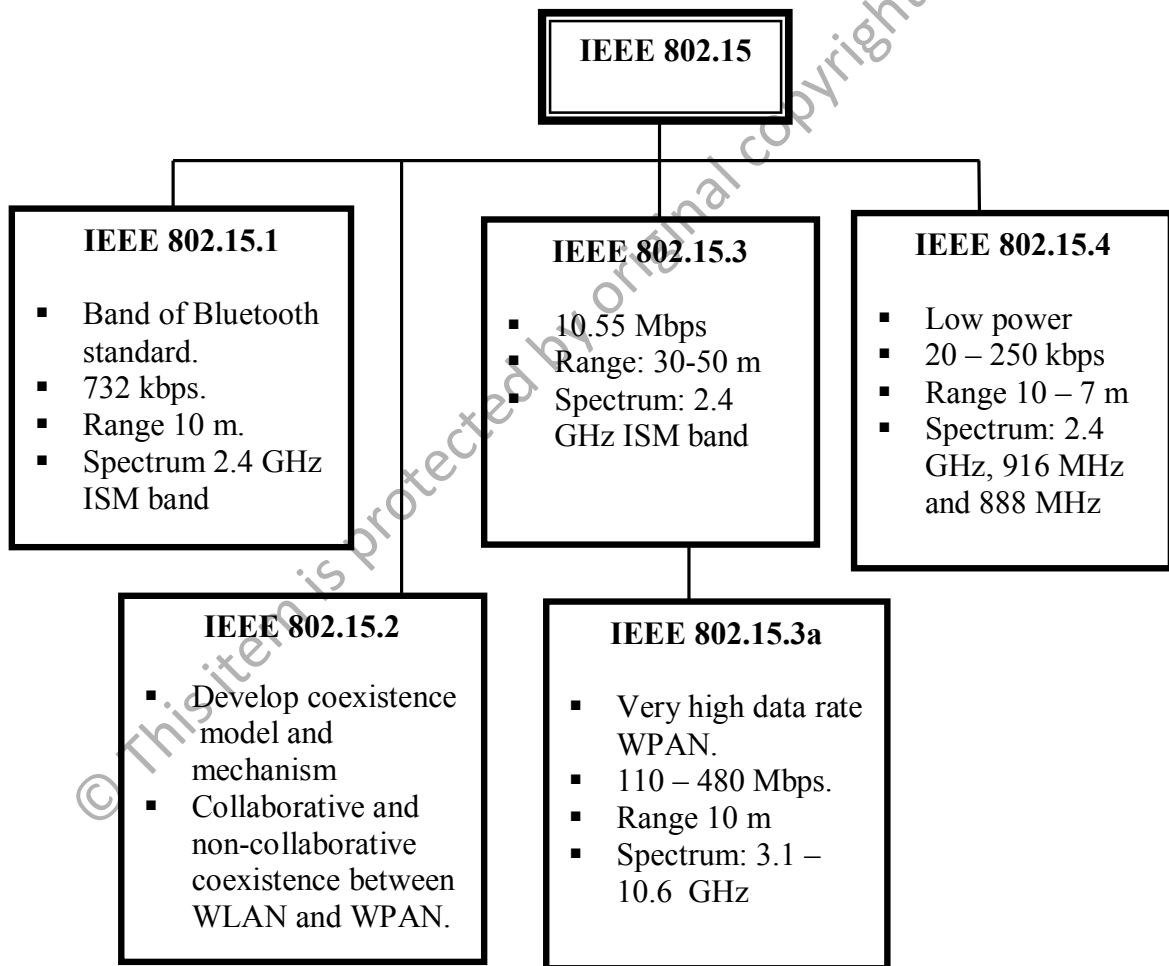


Figure 1.1: Organization of IEEE 802.15 Wireless PAN Group.

Body centric wireless communication has been implemented for indoor wireless communication, which covers a wide variety of situation ranging from communication with

individuals walking in residential or schools and hospitals. Body centric wireless networks require body worn antenna or also called wearable antenna. The wearable antenna has to be immune to the presence of human body. This is due to the electromagnetic absorption in tissue, which could result in changes to the antenna's impedance bandwidth, gain and efficiency. In addition, the wearable antenna must have a safe specific absorption rate (SAR) level to avoid excessive electromagnetic radiation to the users. This can be achieved if the antenna has a good shielding mechanism. For users' comfort, the wearable antenna is desired to be light weight, flexible and able to conform to the curvature of human body. In order to fulfil these requirements, the proposed antenna is made purely from textile to guarantee flexibility and comfort.

The proposed design utilize conductive textiles, which are constructed by interpolating conductive metal/polymer threads with normal fabric threads or conductive threads. This results in an ordinary-feel textile/cloth. In the late 1980's conductive textiles were first used as electromagnetic shielding material (Joyner, 1989). Antenna developers have recently found out that conductive textiles are also suitable for antenna design, proving them comparable to conventional antennas designed using printed circuit board (PCB) materials.

While most of the reported wearable antenna has single band frequency for wireless communications around 2.45GHz (Salonen, 2001; Tronquo, 2006; Hertleer, 2007), few are able to operate for dual frequency bands, allowing simultaneous mobile network connections at both 2.45GHz and 5 GHz. The wearable antenna proposed in this research is

designed for 5.15 – 5.75 GHz HiperLAN and unlicensed 2.45 GHz ISM (Industrial, Science and Medical) band due to the significant interest in the use of Bluetooth/WLAN modules for body worn devices.

## 1.2 Problem Statement

Body worn antenna or wearable antenna is an antenna that can be worn or integrated into clothing. This requires its material to be flexible and light weight to guarantee user comfort, besides being able to conform to the curvature of human body (such as around the human arm). There exist limitations for antenna design manufactured from rigid printed circuit board (PCB) materials, such as conventional Rogers, Taconic and FR-4 board. These materials are non-flexible, making it unsuitable for body worn applications. Conductive textiles is seen as the most suitable to fit this purpose: it has good conductivity, enabling it to radiate electromagnetic waves, is light weight and flexible. There are several existing textile antennas that can operate in dual frequency. The proposed antenna capable for dual band frequency, therefore it can be used for two applications and reduce the numbers of required antennas to be used in a single device.

### 1.3 Research Objective

The objectives of this research are as follows:

- i. To investigate suitability and reliability of conductive textiles for antenna design.
- ii. To investigate the effects of slits and slots to realize the dual band ability of wearable textile antenna.
- iii. To develop wearable textile antenna with safe specific absorption rate (SAR) value which is less than 2 W/kg.
- iv. To develop antenna with wide bandwidth with simple design techniques.
- v. To develop wearable textile antenna capable to operate for frequencies bands of 2.40–2.48 GHz and 5.15 – 5.75 GHz (ISM and HiperLAN) using a single structure.

### 1.4 Research Scope

The main scope of the research work presented in the thesis is to design and develop antennas using conductive textiles suitable for body area network. The main purpose is to achieve an efficient, light weight and low profile textile antenna capable of operating in frequencies bands of 2.40 – 2.48 GHz and 5.15 – 5.75 GHz for ISM and HiperLAN using a single structure. The development and analysis of the antennas are performed using CST Microwave Studio simulation software. Fundamental parameters of the antenna namely