

**AN ENERGY ABSORPTION CHARACTERIZATION  
OF IMPROVED CIRCULAR THIN-WALLED TUBES  
UNDER DYNAMIC LOADING**

**MASNIEZAM BIN AHMAD**

**UNIVERSITI MALAYSIA PERLIS**

**2013**

© This item is protected by original copyright



**UniMAP**

**AN ENERGY ABSORPTION CHARACTERIZATION OF  
IMPROVED CIRCULAR THIN-WALLED TUBES  
UNDER DYNAMIC LOADING**

by

**MASNIEZAM BIN AHMAD  
(1131410648)**

A thesis submitted  
in fulfillment of the requirement for the degree of  
Master of Science (Mechanical Engineering)

**SCHOOL OF MECHATRONIC ENGINEERING  
UNIVERSITI MALAYSIA PERLIS**

2013

# UNIVERSITI MALAYSIA PERLIS

## DECLARATION OF THESIS

Author's full name : MASNIEZAM BIN AHMAD  
Date of birth : 22 JANUARY 1988  
Title : AN ENERGY ABSORPTION CHARACTERIZATION OF IMPROVED  
CIRCULAR THIN-WALLED TUBES UNDER DYNAMIC LOADING  
Academic Session : 2011/2012

I hereby declare that the thesis becomes the property of Universiti Malaysia Perlis (UniMAP) and to be placed at the library of UniMAP. This thesis is classified as :

- CONFIDENTIAL** (Contains confidential information under the Official Secret Act 1972)
- RESTRICTED** (Contains restricted information as specified by the organization where research was done)
- OPEN ACCESS** I agree that my thesis is to be made immediately available as hard copy or on-line open access (full text)

I, the author, give permission to the UniMAP to reproduce this thesis in whole or in part for the purpose of research or academic exchange only (except during a period of \_\_\_\_\_ years, if so requested above).

Certified by:

\_\_\_\_\_  
**SIGNATURE**

\_\_\_\_\_  
**SIGNATURE OF SUPERVISOR**

\_\_\_\_\_  
880122-26-5241  
**NEW IC NO.**

\_\_\_\_\_  
DR. KHAIRUL AZWAN BIN ISMAIL  
**NAME OF SUPERVISOR**

Date: 8 JULY 2013

Date: 8 JULY 2013

## ACKNOWLEDGMENTS

Alhamdulillah, all praises to Allah for the strengths and His blessing in completing this thesis. First of all, I am deeply indebted to my supervisor, Dr Khairul Azwan Ismail whose help, stimulating suggestions, knowledge, experience and encouragement that helped me in all the times of study and analysis of the project in the pre and post research period. He inspired me greatly to work in this project.

I also wish to express my gratitude to my co-supervisor, Dr Mohd Afendi Rojan who has given his support, motivation, constructive comments and suggestions that have contributed to the success of this research. Not forgotten, a special appreciation to my mentor, Mrs Fauziah Mat who was abundantly helpful and offered invaluable assistance, support and guidance. I cannot say thank you enough for her tremendous support and help.

I would also like to thank to Ministry of High Education and Universiti Malaysia Perlis for the funding support for this study. Sincere thanks to the laboratory technician Mr Aliff and all my friends for their moral supports in completing this research. I am grateful for their constant support and help.

Last but not least, my deepest gratitude goes to my beloved parents, Ahmad Bin Musa and Masuri Bt Shapiee and also for my family for their love, prayers and encouragement. Also not forgetting my wife, Yuziana Yasin and my son, Fariesh Azham for their understanding and endless love through the duration of this study. To those who indirectly contributed to this research, your kindness means a lot to me.

Thank you very much.

## TABLE OF CONTENTS

	<b>PAGE</b>
<b>DECLARATION OF THESIS</b>	i
<b>ACKNOWLEDGMENTS</b>	ii
<b>TABLE OF CONTENTS</b>	iii
<b>LIST OF TABLES</b>	vii
<b>LIST OF FIGURES</b>	viii
<b>LIST OF ABBREVIATIONS</b>	xii
<b>LIST OF SYMBOLS</b>	xiii
<b>ABSTRAK</b>	xv
<b>ABSTRACT</b>	xvi
<b>CHAPTER 1 INTRODUCTION</b>	
1.1 Project Background	1
1.2 Problem Statement	4
1.3 Objectives	5
1.4 Scopes	5
1.5 Significance of study	6
1.6 Thesis outline	7

## **CHAPTER 2 LITERATURE REVIEW**

2.1	Introduction	8
2.2	Principal of impact mechanics	8
2.3	Crushing modes of the thin-walled tube	9
2.4	Characterizations of energy absorption	11
2.4.1	Total energy absorption	12
2.4.2	Specific energy absorption (SEA)	13
2.4.3	Initial peak load	14
2.4.4	Mean crushing force	14
2.4.5	Crush force efficiency (CFE)	15
2.5	Review of literatures: Thin-walled tube as energy absorber	16
2.5.1	Empty thin-walled tube	16
2.5.2	Effect of material in thin-walled tube	19
2.5.3	Effect of shape in thin-walled tube	21
2.5.4	Filled tube	23
2.5.5	Modification in thin-walled tube	25

## **CHAPTER 3 RESEARCH METHODOLOGY**

3.1	Introduction	30
3.2	Finite Element Analysis	32
3.2.1	Material model	34
3.2.2	Contact, boundary and initial condition	36
3.2.3	Finite element meshing	38
3.3	Mesh convergence study	39
3.3.1	Size mesh mode and deviation mesh mode in modeling shell element in conical tube	40
3.3.2	Element formulations in a converged mesh model	44
3.3.3	Number of through shell thickness integration point (NIP) in a converged mesh model	46
3.4	Drop impact test: Dynamic axial crushing of thin walled tubes	48
3.4.1	Experimental procedure	49

3.4.2	Experimental results	50
3.5	Validation of FEA model	54
3.6	Parametric studies	57
3.7	Tube's modification	59

## **CHAPTER 4 RESULTS AND DISCUSSION**

4.1	Introduction	60
4.2	Effect of tube shape on energy absorption characteristics	60
4.2.1	SEA and CFE result for circular and square tube deformation under different initial conditions	64
4.3	Effect of tube material on energy absorption characteristics	66
4.3.1	Material model development for carbon steel S1214	67
4.3.2	Material model development for magnesium alloy AZ31B-O	68
4.3.3	Comparison of using aluminium alloy, carbon steel and magnesium alloy material in thin-walled tubes deformation	70
4.4	Effect of tube geometry on energy absorption characteristics	76
4.4.1	Effect of thickness, diameter and length of the circular tubes to the result of initial peak load	78
4.4.2	Effect of thickness, diameter and length of the circular tubes to the result of CFE	80
4.4.3	Effect of thickness, diameter and length of the circular tubes to the result of energy absorption	82
4.4.4	Effect of thickness, diameter and length of the circular tubes to the result of SEA	85
4.5	Design modifications on the tubes to enhance the energy absorption characteristics	87
4.5.1	Comparison between straight circular tube and conical tube	90
4.5.2	Modification of straight circular tube	91
4.5.3	Modification of conical tube	93
4.5.4	Combination of circular, conical and hemisphere tube in a single tube design	95

4.5.5	Addition of filler into straight circular tube	96
4.5.6	Summary of tube modification	101
<b>CHAPTER 5 CONCLUSIONS</b>		
5.1	Conclusions	103
5.2	Summary of finite element analysis	103
5.3	Summary of parametric studies	104
5.4	Summary of tube modification design	105
5.5	Recommendations for future work	106
<b>REFERENCES</b>		
107		
<b>APPENDIX A</b>		
114		
<b>APPENDIX B</b>		
118		
<b>APPENDIX C</b>		
132		
<b>APPENDIX D</b>		
133		

© This item is protected by original copyright



## LIST OF TABLES

NO.		PAGE
3.1	Mechanical properties of aluminium alloy AA6061-T6 used in material model.	34
3.2	Effective plastic strain and corresponding stress for AA6061-T6.	35
3.3	Dimension of conical tube used in the mesh convergence study.	39
3.4	Image of specimens and schematic drawing for straight and conical tubes.	48
3.5	Specimen's dimensions and energy absorption characteristics result in dynamic loading.	52
3.6	Comparison of energy absorption characteristics results between experiment and FEA for specimen STR 8.	56
3.7	Comparison of energy absorption characteristics results between experiment and FEA for specimen CON 15.	56
3.8	Details of the parametric studies performed to the thin-walled tube.	58
4.1	Results of parametric study for the crushing of circular and square tube obtained from FEA.	62
4.2	Comparison of energy absorption characteristics between aluminium, carbon steel and magnesium alloy thin-walled tubes obtained from FEA.	72
4.3	Results of the parametric study on various tube geometries obtained from FEA.	77

## LIST OF FIGURES

NO.		PAGE
1.1	Body structure safety cage and crash box element; (a) Overall structure for AUDI A8, (b) Crash box element of AUDI A8 and (c) Crash box element in Honda CR-Z [6].	2
1.2	Modification made to the thin-walled tube of Peugeot 3008 [13].	4
2.1	Crushing modes in progressive buckling; (a) Concertina mode in quasi-static loading, (b) Diamond mode in dynamic loading, (c) Mixed mode in dynamic loading.	10
2.2	Global buckling caused by inverted folding modes [20].	11
2.3	Load-deformation curve for dynamic axial loading of thin-walled tube.	12
2.4	A model of Alexander's concertina mode in initiating plastic deformation [18].	17
2.5	Finite element model for oblique loading [23].	19
2.6	Finite element model for compression of square, circular and ellipse tube [11].	21
2.7	Finite element model for combination of conical and sphere tube [9].	22
2.8	Finite element model for the tube filled with granules [45].	24
2.9	External stiffened circular tube [47].	25
2.10	Finite element model of tube with a cutout [48].	26
2.11	Expanding ring attached at the top of circular tube [10].	27
2.12	Square tube with parallel 45° crack [49].	28
2.13	Circular tube with end-capped [7].	28
3.1	Flow chart of research methodology.	31
3.2	Development of finite element model for dynamic axial crushing of thin-walled tube.	33
3.3	Effect of boundary conditions on (a) Energy absorption and (b) Peak load against different meshing size.	37

3.4	Schematic diagram of meshing in FEA model: (a) Size mesh mode; and (b) Deviation mesh mode.	40
3.5	(a) Energy absorption vs. number of element, and (b): Peak load vs number of element when using different type of mesh modes.	42
3.6	Force-deformation curve by using different mesh modes.	43
3.7	Energy vs. deformation for various meshing size in size mesh mode.	43
3.8	Energy absorption vs. meshing size by using various types of element formulation.	46
3.9	Energy absorption vs. meshing size by using different values of NIP.	47
3.10	Drop test and specimen setup for dynamic axial crushing.	49
3.11	Force-deformation curve for dynamic crushing of straight circular tubes.	53
3.12	Force-deformation curve for dynamic crushing of conical tubes.	53
3.13	Comparison of deformed shape for straight tube (STR 8) between: (a) experiment, and (b) FEA model.	55
3.14	Comparison of deformed shape for conical tube (CON 15) between: (a) experiment, and (b) FEA model.	55
3.15	Comparison of force-deformation curve between experiment and FEA for specimen STR 8.	57
3.16	Comparison of force-deformation curve between experiment and FEA for specimen CON 15.	57
4.1	FEA model of circular and square profile shapes of thin-walled tubes.	61
4.2	FEA results for (a) Force vs. deformation and (b) Energy absorption vs. deformation; for circular tube (C2) and square tubes (S2).	63
4.3	FEA results for the effect of initial conditions to SEA and CFE results for circular and square tubes; (a) SEA vs. impact velocity, (b) SEA vs. impact mass, (c) CFE vs. impact velocity and (d) CFE vs. impact mass.	64
4.4	True stress vs. effective plastic strain for carbon steel S1214 applied in FEA [8].	67

4.5	Comparison of experimental and simulations when using different material models in engineering stress-strain curves for AZ31B-O at nominal strain rate of $1000\text{s}^{-1}$ [68].	69
4.6	FEA results for (a) Force-deformation curve, and (b) Energy absorption vs. deformation of aluminium alloy, carbon steel and magnesium alloy tubes at 10 m/s impact velocity.	73
4.7	FEA results for SEA vs. deformation length of different tube materials at impact velocity of: (a) 6 m/s, (b) 8 m/s and (c) 10 m/s.	74
4.8	Effect of impact velocity to the CFE in different tube materials at deformation length of 20mm obtained from FEA.	75
4.9	FEA results for initial peak load when crushing the 100mm length of circular tube in various thickness and diameter.	78
4.10	FEA results for initial peak load when crushing the 100mm diameter of circular tube in various thickness and length.	79
4.11	FEA results for initial peak load when crushing the 1.5mm thickness of circular tube in various length and diameter.	79
4.12	FEA results for CFE when crushing the 100mm length of circular tube in various thickness and diameter.	81
4.13	FEA results for CFE when crushing the 50mm length of circular tube in various thickness and length.	81
4.14	FEA results for CFE when crushing the 0.5mm thickness of circular tube in various length and diameter.	82
4.15	FEA results for energy absorption when crushing the 100mm length of circular tube in various thickness and diameter.	83
4.16	FEA results for energy absorption when crushing the 50mm diameter of circular tube in various thickness and length.	84
4.17	FEA results for energy absorption when crushing the 0.5mm thickness of circular tube in various length and diameter.	84
4.18	FEA results for SEA when crushing the 50mm length of circular tube in various thickness and diameter.	86
4.19	FEA results for SEA when crushing the 50mm diameter of circular	86

	tube in various thickness and length.	
4.20	FEA results for SEA when crushing the 2.0mm thickness of circular tube in various length and diameter.	87
4.21	Design modifications on thin-walled tubes developed by FEA.	89
4.22	FEA results for the comparison of: (a) Force-deformation curve, and (b) SEA vs. deformation curve between straight circular tube and conical tube.	90
4.23	FEA results for the force-deformation curve for original straight circular tube (M1) and modified tubes (M2, M3 and M4).	91
4.24	FEA results for the comparison of (a) CFE, and (b) SEA between original tube (M1) and modified straight circular tubes (M2, M3 and M4).	92
4.25	FEA results for the force-deformation curve for original tube (M5) and modified conical tubes (M6 and M7).	93
4.26	FEA results for the comparison of (a) CFE, and (b) SEA between original conical tube (M5) and modified conical tubes (M6 and M7).	94
4.27	FEA results for the comparison of (a) Force-deformation curve, and (b) SEA vs. deformation between original tube (M1) and modified combination tubes (M8 and M9 designs).	95
4.28	Stress-strain diagram for extruded polystyrene foam obtained from quasi-static compression test.	97
4.29	Comparison between experimental and finite element analysis in force-deformation curve for: (a) Straight circular tube, and (b) conical tube.	98
4.30	FEA results for the comparison of force-deformation curve between empty and foam filled straight circular tube.	99
4.31	FEA results for the comparison of (a) Energy absorption, and (b) SEA between empty and foam-filled straight circular tube.	100
4.32	FEA results for the comparison of energy absorption characteristic between modification designs; (a) Initial peak load, (b) Energy absorption, (c) CFE and (d) SEA.	101

## LIST OF ABBREVIATIONS

ASTM	American society for testing and materials
C	Circular tube designation
CFE	Crush force efficiency
CON	Conical tube designation
DOE	Design of experiment
FE	Finite element
FEA	Finite element analysis
GA	Genetic algorithm
M	Modification tube designation
NIP	Number of integration point
NODOUT	Nodal displacement
PVC	Polyvinylchloride
RCFORC	Resultant interface forces
RSM	Response surface methodology
S	Square tube designation
SEA	Specific energy absorption
STR	Straight tube designation
UTM	Universal testing machine

## LIST OF SYMBOLS

$cm^3$	Centimeter cubic
$C$	Cowper'symonds constant
$D$	Tube diameter
$E$	Elastic modulus
$E_a$	Energy absorption
$E_{kinetic}$	Kinetic energy
$F_{mean}$	Mean crushing force
$F_{peak}$	Peak load
$G$	Shear modulus
$g$	Gravity constant
$g$	Gram
$GPa$	Gigapascal
$J$	Joule
$kg$	Kilogram
$kN$	Kilonewton
$l$	Original length of the tube
$m$	Mass
$mm$	Millimeters
$mV$	Milivolts
$N$	Newton
$P$	Crushing load
$p$	Cowper'symonds constant
$t$	Tube thickness
$T_{melt}$	Melting temperature
$T_{room}$	Room temperature
$T^*m$	Homologous temperature
$\nu$	Poisson's ratio
$\delta$	Deformation length

$\dot{\epsilon}$	Strain rate
$\epsilon_p$	Effective plastic strain
$\dot{\epsilon}^*$	Dimensionless strain rate
$\sigma_0$	Mean plastic flow stress
$\sigma_y$	Yield stress
$\rho$	Mass density
%	Percentage

© This item is protected by original copyright



## **Ciri-ciri Penyerapan Tenaga Oleh Tiub Bulat Berdinding Nipis Melalui Beban Dinamik**

### **ABSTRAK**

Tiub berdinding nipis adalah salah satu daripada alat penyerap tenaga yang direka untuk melepaskan tenaga dan meningkatkan kecekapan struktur bagi menahan hentakan dalam peristiwa hentaman. Semasa pelanggaran, tiub berdinding nipis akan melenyapkan tenaga kinetik di dalam sesuatu struktur dengan cara menukarkan tenaga kinetik kepada tenaga yang lain, sekali gus mengurangkan kesan yang dialami oleh penumpang. Penyelidikan ini mengkaji tiub berdinding nipis yang dihentak menegak secara dinamik dengan menggunakan penguji pelepasan beban. Model elemen unsur terhingga untuk penghentakan tiub telah dibentuk dengan menggunakan perisian LS-DYNA dan keputusan yang baik telah diperolehi antara model unsur terhingga dan keputusan eksperimen. Kajian parametrik ke atas tiub berdinding nipis telah dilakukan dengan menggunakan model unsur terhingga yang telah disahkan. Ciri-ciri penyerapan tenaga yang dianalisis termasuklah kapasiti penyerapan tenaga, beban tinggi terawal, penyerap tenaga spesifik (SEA) dan kecekapan beban pelanggaran (CFE). Bentuk, bahan dan geometri tiub divariasikan untuk menyiasat kesan menggunakan parameter ini terhadap ciri-ciri penyerapan tenaga. Hasilnya, tiub berbentuk bulat mampu menghasilkan ciri-ciri penyerapan tenaga yang lebih baik berbanding tiub berbentuk segiempat. Tiub yang diperbuat daripada tiga bahan yang berbeza iaitu aluminium aloi AA6061-T6, karbon keluli S1214 dan magnesium aloi AZ31B-O telah digunakan dalam LS-DYNA. Didapati bahawa magnesium aloi AZ31B-O sangat berpotensi untuk dijadikan sebagai bahan dalam pembuatan tiub berdinding nipis selain daripada aluminium aloi dan karbon keluli memandangkan ia mempunyai keputusan yang sangat bagus dari segi beban tinggi terawal, SEA dan CFE. Walaubagaimanapun, apabila sesuatu aplikasi tidak menitik beratkan kerosakan struktur dan tidak melibatkan manusia, karbon keluli adalah terbaik kerana dapat menyerap lebih banyak tenaga dan mempunyai purata beban pelanggaran yang tinggi. Faktor bagi panjang, diameter dan ketebalan tiub terhadap ciri-ciri penyerapan tenaga juga telah dikaji. Kesimpulannya, beban tinggi terawal dan CFE adalah optimum bagi tiub yang lebih tebal dan besar. Kapasiti penyerap tenaga adalah optimum bagi tiub yang lebih tebal, besar dan panjang, sementara keputusan SEA adalah optimum untuk tiub yang lebih tebal, kecil dan pendek. Akhir sekali, pengubahsuaian yang dilakukan terhadap tiub asal telah meningkatkan ciri-ciri penyerapan tenaga berbanding tiub asal. Kombinasi antara tiub berbentuk kon dan penutup berbentuk rata telah dicadangkan sebagai modifikasi tiub yang terbaik kerana ia memberikan keputusan yang cemerlang untuk beban tinggi terawal, CFE dan SEA serta memberikan keputusan yang sederhana untuk kapasiti penyerapan tenaga. Maklumat penyelidikan yang disediakan dalam kajian ini akan menjadi panduan untuk merekabentuk tiub berdinding nipis pada masa yang akan datang.

# **An Energy Absorption Characterization of Improved Circular Thin-Walled Tube under Dynamic Loading**

## **ABSTRACT**

Thin-walled tube is one of the energy absorber devices designed to dissipate energy and increase the efficiency of a crashworthiness structure in an impact event. During an accident, thin-walled tube dissipates the kinetic energy of the structure and converts the kinetic energy into the other form of energy thus minimize the impact experienced by the occupant. This research examines the thin-walled tube subjected to axial dynamic crushing experiment by using a drop weight impact tester. A nonlinear finite element model for the tube crushing has been developed by using LS-DYNA software and a good agreement has been achieved between the finite element model and experimental results. The parametric studies of the thin-walled tubes have been performed by using the validated FE model. The analysis of energy absorption characteristics includes the energy absorption capacity, initial peak load, specific energy absorption (SEA) and crush force efficiency (CFE) results. The shape, material and geometry of the tube are varied to investigate the effect of using these parameters to the energy absorption characteristics. As a result, circular tube is capable to provide better energy absorption characteristics compared to the square tube. The tubes designed by three different materials which are aluminium alloy AA6061-T6, carbon steel S1214 and magnesium alloy AZ31B-O has been developed in LS-DYNA. It was found that the magnesium alloy AZ31B-O is highly potential to be created as the thin-walled tube material instead of aluminium alloy and carbon steel since it has excellent result in initial peak load, SEA and CFE. However, when the applications neglect the damage of the structure and does not involving human, carbon steel is the best material as it can absorb most energy capacity and high mean crushing force. The effect of length, diameter and thickness of the tube to the energy absorption characteristics has been investigated. It was concluded that initial peak load and CFE are optimum in thicker and larger tube. Energy absorption capacities are optimum in thicker, larger and longer tube while SEA result is optimum in thicker, smaller and shorter tube. At the end, the modifications performed on the original tube shows an improvement in the energy absorption characteristics compared to the current tube designs. A combination of conical tube with flat end cap was proposed as the best modified tube since it has excellent results on initial peak load, CFE and SEA with moderate results on the energy absorption capacity. Research information provided in this study will serve as a guide to design the thin-walled tube in the future.

# CHAPTER 1

## INTRODUCTION

### 1.1 Project background

Crashworthiness can be defined as the ability of a structure to prevent occupant injuries during an impact [1]. Many manufacturers especially in producing vehicles and moving part such as automotive, aircraft, ships, railway coaches, lift and others machinery aim to make an improved crashworthy structure to increase the occupant safety during an accident or collision. Energy absorber is the main component to increase efficiency of a crashworthiness structure. During an accident, energy absorber dissipates the kinetic energy of the structure and converts the kinetic energy into the other form of energy thus minimize the impact experienced by the occupant. The impact energy is converted into strain energy through structural deformation. In general, the efficiency of the energy absorber is optimum when the system can provide maximum energy absorption, stable progressive collapse mode, lower initial peak crushing load, longer deformation length, deformation in concertina mode with shorter length of fold and produce a large number of fold. The studies of crashworthiness have been at interest to many researchers in the past until this date [2-5].

Some example of energy absorber structures are thin-walled tube, sandwich structure, egg-box material, lattice structure and cellular material. However, the application using the thin-walled tube as energy absorber received the most attention from the researchers

because it is easy to produce and the structure proved to absorb more energy capacity at large deformation of the tube.

Fig. 1.1 shows the applications of energy absorber in the crash box element of the cars. Fig. 1.1(a) illustrates the overall body structure safety cage and Fig. 1.1(b) focuses in the crash box element of an AUDI A8 manufactured in year 2011. It is clearly shown that the car crash box element uses the square shape of thin-walled tube structure as the energy absorber to resist the impact when accident occurs.

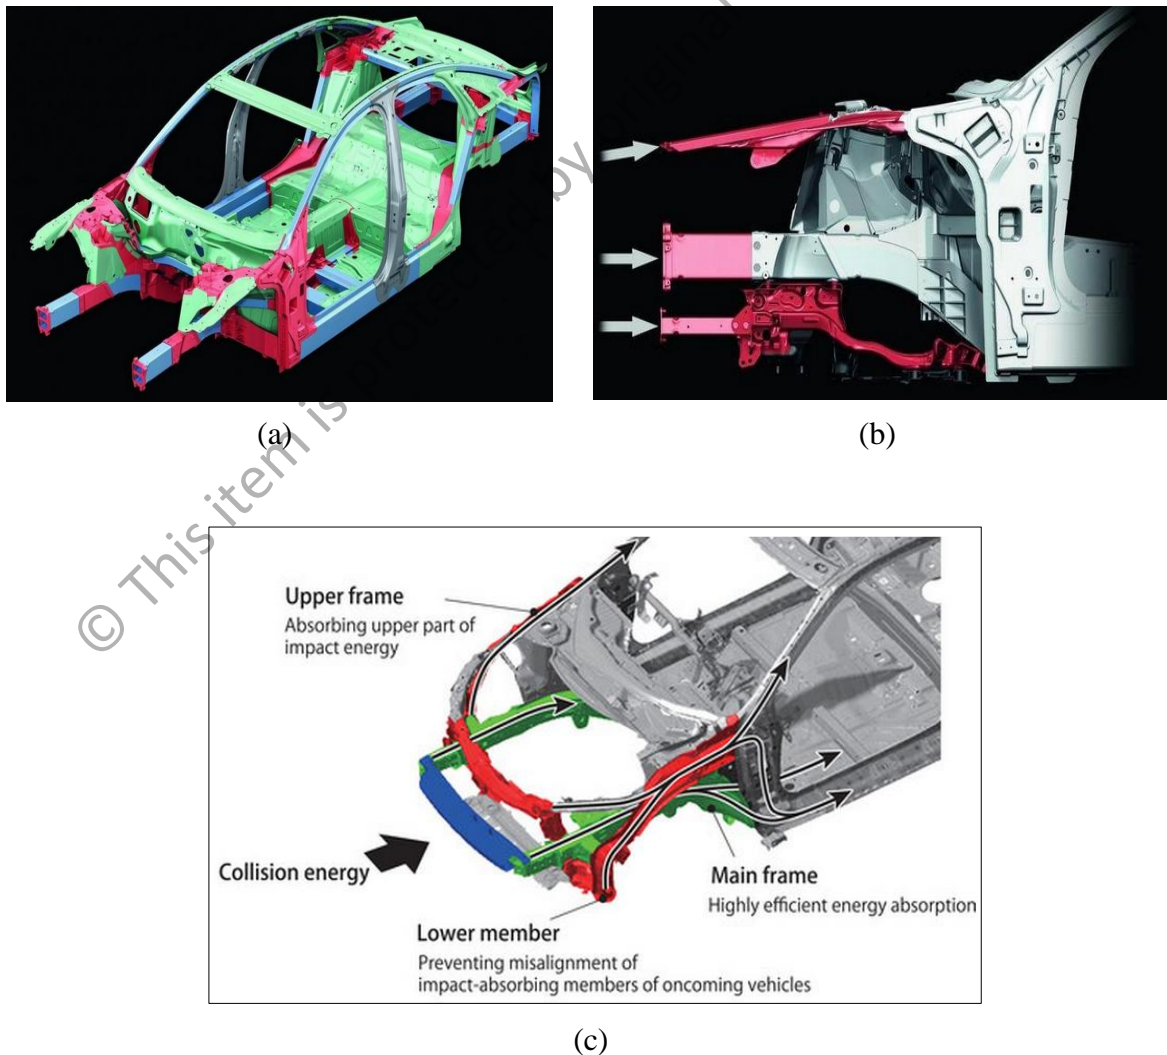


Fig 1.1: Body structure safety cage and crash box element; (a) Overall structure for AUDI A8, (b) Crash box element of AUDI A8 and (c) Crash box element in Honda CR-Z [6].

Besides that, Fig. 1.1(c) shows the combination of main frame, upper frame and lower member used as energy absorber in Honda CR-Z. The thin-walled tube of the main frame designed to absorb most kinetic energy during the collision by deformation of the structure and dissipate the energy to the other members. Regarding to this matter, many researchers focused in improving the efficiency of this structure either by using experimental or simulation analysis methods [7-8].

A lot of methods and modifications had been done by the previous researchers in order to analyze and improve the energy absorption characteristics of the thin-walled tube structure [9-10]. One of the methods used various shapes of the cross section of the thin walled tube such as circular, triangular, square and hexagon that are employed in thin-walled structure [9, 11]. Furthermore, new material development technology has encouraged researchers to use variety of materials available to improve the performance of energy absorption characteristics.

On the other hand, some modifications had been performed by combining different types of energy absorber in a single structure. Since the result of the research proved that using combination of geometry and making modification on the energy absorber can improve the energy absorption characteristic, some of the car manufacturers applied this invention in their production [10, 13]. For example, Peugeot from France, a well-known car manufacturer tried to improve their occupant safety by modification of the energy absorber in their new car model (Peugeot 3008) in 2011 [13]. Fig. 1.2 shows two conical energy absorbers positioned between the impact absorption beam and chassis leg to control the deformation of the thin-walled tube in the event of collision.



Fig. 1.2: Modification made to the thin-walled tube of Peugeot 3008 [13].

## 1.2 Problem statement

A lot of works have been developed by previous researchers and engineers to investigate the thin-walled tube as an energy absorption structure [2-5]. Since investigation in thin-walled structure is very wide-ranging, researchers still do not find the best energy absorber because their result shows both advantages and disadvantages in their designs [14-15]. With the growth of material development in industries, the application of using the new materials as the energy absorber has created a challenge to the researchers and engineers especially to produce both lightweight and high strength structure.

The design of the energy absorber still need more attention by researchers because there are big numbers of geometry, shape and modification can be performed in designing the structure. However, perfection can be achieved through further study and analysis of the energy absorber. For this concern, this study is made to design an improved thin-walled structure by using a new material and some modifications to determine and improve the energy absorption characteristics in thin-walled tube structure as the energy absorber.

### **1.3 Objectives**

The main objectives of this research are listed as follows:

- a) To develop a nonlinear finite element model for deformation of circular and conical thin-walled tubes during dynamic axial loading.
- b) To validate the nonlinear finite element model with experimental results.
- c) To perform parametric studies for tubes under dynamic loading and modify the current tube designs to enhance the energy absorption characteristics.

### **1.4 Scopes**

In the initial stage of this research, the specimens of thin-walled tube are tested under dynamic axial loading experiment. LS-DYNA finite element analysis software will be used to simulate the experimental test and the results obtained by LS-DYNA are compared with experiment results for the verification and validation purposes. In addition, LS-DYNA software will be also employed to perform the parametric studies and modification of the thin-walled tubes. The application of using various materials, shapes, geometries and loading conditions of thin-walled tube are discussed in the parametric studies. The main findings from the parametric studies are referred in designing several modified thin-walled tubes. The thin-walled tube with greatest energy absorption characteristics will be proposed at the end of the research.

## 1.5 Significance of study

The main contribution of this study is to provide additional research information of thin-walled tube application as energy absorber. This research is expected to get the energy absorption characteristics of improved thin-walled tubes under dynamic axial loading. Since the improved thin-walled tube will be more efficient for the energy absorber, it can be used as the new structure for the application in industry, military, automotive or manufacturing. Thus, the aim to increase the performance of crashworthiness and protect structures from serious damages when subjected to dynamic loading can be achieved.

Besides that, the effects of using various shapes of thin-walled tube to the energy absorption capacity are observed in this study. Furthermore, the study on using various geometries such as thickness, length and diameter of the thin-walled tube will help to provide a design guideline for the engineers, researchers and designers to create the most efficient thin-walled tube in the future. In addition, the results of combining various shapes of thin-walled tubes as a single structure also presented in this study.

This research also presents the effects of using various tube materials on the energy absorption characteristics. The aim is to obtain a light weight and high strength tube that can absorb most kinetic energy during the accident. In fact, the weight reduction in the automotive application improves the performance of vehicle by reducing the fuel consumption, thus reducing the effect of global warming.